


DIMENSIONS

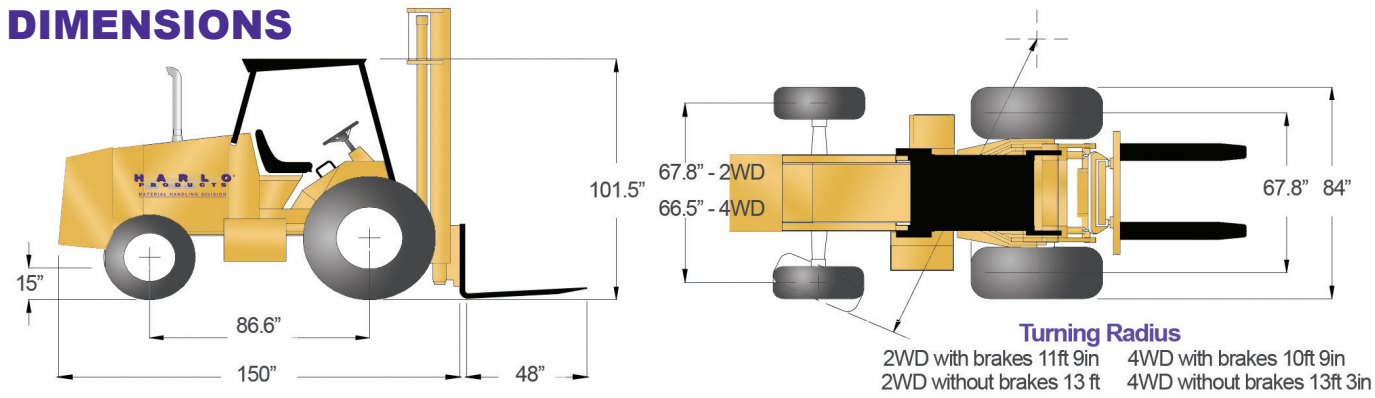

MAST OPTIONS

Lift Height	Type	Available Carriage Width	Stage	Overall Lowered	Overall Extended	Capacity at 24" Load Center	2WD Weight	4WD Weight	Freelift
15' Roller	Notch ITA Class 3	60" 72" 84" 96"	2	125 in	212 in	8500lbs to 15'	15,624 lb.	15,907 lb	None
16' Roller	Notch ITA Class 3	60" 72" 84"	3	100 in	228 in	8500lbs to 12' 6500lbs to 16'	15,780 lb	15,953 lb	None
20' Freelift	Notch ITA Class 3	60" 72" 84"	3	117 in	277 in	8500lbs to 12' 6500lbs to 15' 2500lbs to 20'	15,984 lb	16,403 lb	80"
20' Freelift	Swing Carriage	84"	3	117 in	277 in	8500lbs to 12' 6500lbs to 15' 2500lbs to 20'	15,984 lb	16,403 lb	80"
22' Roller	Notch ITA Class 3	60" 72" 84"	3	125 in	300 in	8500lbs to 12' 6500lbs to 15' 2500lbs to 22'	16,099 lb	16,497 lb	None
15' Roller	Swing Carriage	60" 72" 84"	2	125 in	212 in	8500lbs to 15'	15,624 lb	15,907 lb	None
22' Roller	Swing Carriage	60" 72" 84"	3	125 in	300 in	8500lbs to 12' 6500lbs to 15' 2500lbs to 22'	16,099 lb	16,497 lb	None

SHOWN WITH OPTIONAL ENCLOSED CAB

Designed with operator comfort in mind, HARLO offers its enclosed cab option exclusively for HP6500 and HP8500 models. The cab is built to maximize operator visibility and space. Heat and air conditioning are also available options with an enclosed cab.

HP8500



PRODUCTIVITY.

HARLO's largest rough terrain forklift, the HP8500, offers **20 different mast configurations at five different heights**. The HP8500 is available with several industry focused optional features; including an industry exclusive integrated pipe clamp. The HP8500, with HARLO's heavy gage steel construction and best in class lift capacity, is designed to handle the roughest work environments and is most commonly found in pipe yards, oil refineries, and construction sites.

